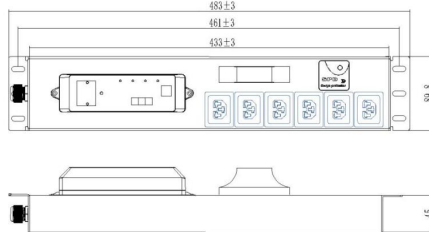


Product Name	RPDU, 1 Phase, 10A, 230V, 6°C39, 1P 10A Chint Circuit Breaker, Surge protection, 3m Power cord with C14 plug		
Part No.	YS1206-6C13-6C19-KGS-M		
			
Specifications			
Main			
Nominal Input Voltage	230V		
PDU Type	Metered		
Frequency	50Hz		
Phase	1 Phase		
Plug Type	C14		
Power Cord	3*1.5mm2		
Cable Length	3M		
Rated Current	10A		
Protections			
Circuit Overload Protection	1P 10A Chint Circuit Breaker		
Monitoring & Communication			
Input/Phase/Circuit Metering	Yes		
Unit Level Monitored	Yes		
Socket Level Monitored	No		
Monitoring Parameter	Yes (Voltage, current, power, energy, power factor)		
Breaker Status Monitoring	No		
Socket Level Switching	No		
Environmental Monitoring	Yes		
Environmental Monitoring Parameter	Yes (Temperature and humidity)		
Communication Port Protocol	Yes (TCP/IP, HTTP, SNMP V1 / V2C, SMTP)		
Cascading	Yes (5 devices)		
Rotatable LCD Display	Yes		
USB/WEB Software upgrade	Yes (Web)		
Hot Swap Intelligent Controller	Yes		
Output			
Nominal Voltage	230V		
Max Output Current	10A		
Socket Type	6°C39		
Socket Locking	No		
Socket Colour	Black		
Physical			
Colour	Black		
Height	483mm		
Width	89.8mm		
Depth	45mm		
Housing Material	Aluminium		
Mounting Position	Horizontal		
Cable Position	Left		
Environmental			
Operating Temperature	0-60C		
Storage Temperature	-25C to +65C		
Operating Altitude	0-3000m		
Relative Humidity	5-95%		
Environmental Compliance			
Warranty	1 Years repair or replace		
Compliance			
Safety & Quality	CE Certified, Certified to EN IEC 62368-1 : 2020 + A11:2020		
Electro-Magnetic Compatibility	Certified to EN 55032:2015/A11:2020, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3 : 2013 + A2:2021+AC:2022-01, EN 55035 : 2017/A11:2020		